


999.00 EUR
 incl. 19% VAT, plus [shipping](#)

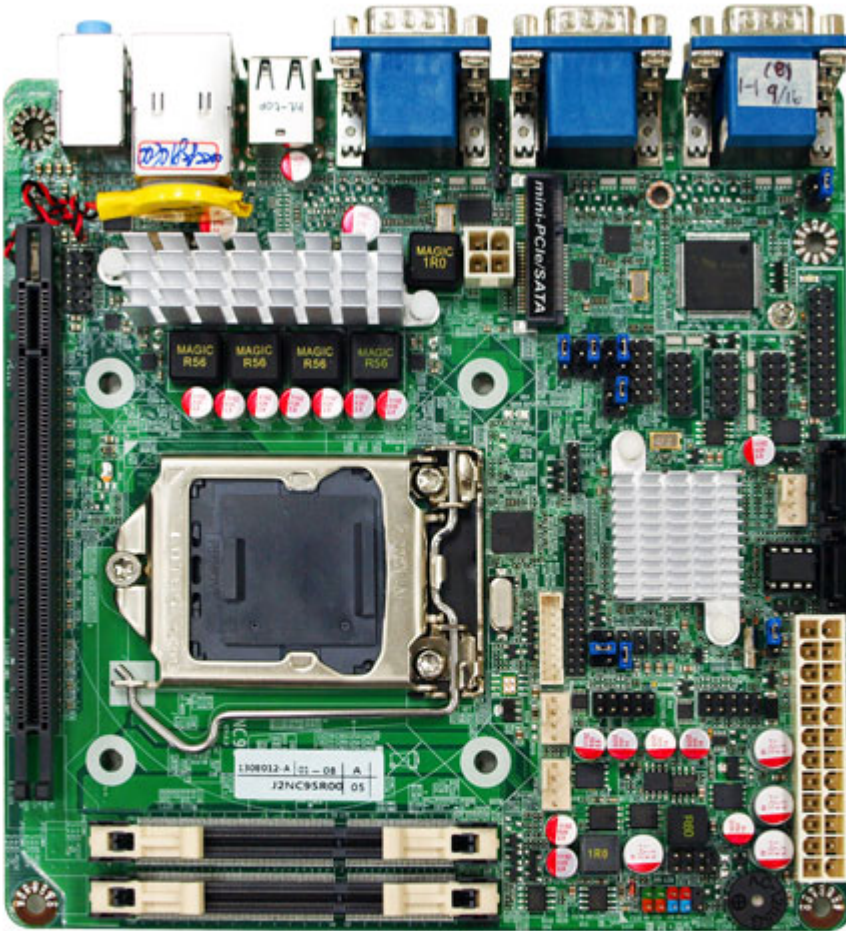

- INTEL® LGA 1150 Processor + B85 Chipset
- Support 2 * DDR3 1600/1333MHz Dual CH up to 16GB
- Support DirectX 9 Graphics
- Support 2 * Serial ATAPII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 1 * 24 bits Dual Channel LVDS header
- Supports 1 * Intel i217LM Gigabit LAN
- Support 6 * COM ports (COM1 support RS232/422/485)
- Support Windows 8
- Support Watch dog Technology
- Provides AT mode power
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

| | |
|------------------------|--|
| CPU | • INTEL® LGA1150 |
| Chipset | • INTEL® B85 chipset |
| Memory | • 2 * DDR3 1600/1333MHz Dual CH SO-DIMM up to 16GB |
| Expansion Slots | • 1 * PCI -E x 16 slot |

| | |
|---------------------------|--|
| • Storage | <ul style="list-style-type: none"> • 2 * Serial ATA3 6Gb/s connectors • 1 * mSATA full size slot (Share W/Mini PCI-E slot) |
| • Audio | <ul style="list-style-type: none"> • Realtek ALC662 6-Channel HD Audio |
| • Ethernet LAN | <ul style="list-style-type: none"> • 1 * INI217LM PCI-E Gigabit LAN |
| • LVDS | <ul style="list-style-type: none"> • Onboard 1 * 24-bits Dual channel connector |
| • USB | <ul style="list-style-type: none"> • Embedded 6 * USB 2.0/1.1 / 2 * USB 3.0 |
| • Special Features | <ul style="list-style-type: none"> • Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog |
| • Rear Panel I/O | <ul style="list-style-type: none"> • 2 * USB 2.0/1.1 ports • 2 * USB 3.0 ports • 1 * RJ-45 port • 3 * Audio I/O ports (Line-in, MIC and Line-out) • 3 * VGA ports • 3 * COM ports (COM1 for RS232/422/485) |
| • Internal I/O | <ul style="list-style-type: none"> • 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports • 3 * COM ports header • 2 * NB / Chassis Fan connectors • 1 * LVDS headers / 1 * Inverter headers • 1 * AUDIO header • 1 * HDMI-SPDIF header • 1 * PS/2 header • 1 * TPM header • 1 * GPIO header • 1 * AT mode selectable header • 1 * Chassis Intrusion |
| • BIOS | <ul style="list-style-type: none"> • AMI 64MB UEFI DIP Flash ROM |
| • Functional | <ul style="list-style-type: none"> • POS Machine |
| • Packing | <ul style="list-style-type: none"> • Color Box Dimension ■ 200(W) x 200(D) x 70(H)mm |
| • Certificate | <ul style="list-style-type: none"> • CE, FCC, RoHS |
| • Temperature | <ul style="list-style-type: none"> • Operating within 0~40 centigrade • Storage within -20-85 centigrade |
| • Form Factor | <ul style="list-style-type: none"> • Mini ITX Form Factor(17cmx17cm) |